

08-07-00

**FISH & RICHARDSON P.C.**

August 4, 2000

Attorney Docket No.: 06269-029001

**Box Patent Application**

Commissioner for Patents

Washington, DC 20231

Presented for filing is a new patent application claiming priority from a provisional patent application of:

Applicant: DALE SCHOLTENS AND MICHAEL J. KLEMM

Title: PRIVATE LINES TRAVERSING A PACKET NETWORK AND RE-ARRANGEMENT OF CHANNELS AMONG PACKET NETWORK CONNECTIONS

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

	<u>Pages</u>
Specification	14
Claims	6
Abstract	1
Declaration [To be Filed at a Later Date]	
Drawing(s)	3

Enclosures:  
— Postcard.

Under 35 USC §119(e)(1), this application claims the benefit of prior U.S. provisional application 60/147,462, filed August 6, 1999.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EE 647 282 209 US

I hereby certify under 37 CFR §110 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D C 20231.

August 4, 2000  
Date of Deposit

Francisco Robley  
Signature

Francisco Robley  
Typed or Printed Name of Person Signing Certificate

45 Rockefeller Plaza  
Suite 2800  
New York, New York  
10111

Telephone  
212 765-5070

Facsimile  
212 258-2291

Web Site  
www.fr.com

JC781 U.S. PTO  
09/632395  
08/04/00

JC902 U.S. PTO  
08/04/00

Fredrick P. Fish  
1855-1930

W.K. Richardson  
1859-1951



BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

FISH & RICHARDSON P.C.

Commissioner for Patents

August 4, 2000

Page 2

Basic filing fee	\$690
Total claims in excess of 20 times \$18	\$90
Independent claims in excess of 3 times \$78	\$390
Fee for multiple dependent claims	\$0
Total filing fee:	\$1170

A check for the total filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.

If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (212) 765-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

Fish & Richardson P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

Respectfully submitted,



Samuel Borodach  
Reg. No. 38,388  
Enclosures  
SXB/dlm  
30023898 doc

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: PRIVATE LINES TRAVERSING A PACKET NETWORK  
AND RE-ARRANGEMENT OF CHANNELS AMONG  
PACKET NETWORK CONNECTIONS

APPLICANTS: DALE A. SCHOLTENS; MICHAEL J. KLEMM

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No EE 647 282 209 US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D C 20231

August 4, 2000

Date of Deposit

Francisco Roble

Signature

Francisco Roble  
Typed or Printed Name of Person Signing Certificate

004020 " 5626350

**PRIVATE LINES TRAVERSING A PACKET NETWORK AND RE-ARRANGEMENT  
OF CHANNELS AMONG PACKET NETWORK CONNECTIONS**

**CROSS REFERENCE TO RELATED APPLICATIONS**

5        This application claims the benefit of priority of U.S.  
Provisional Patent Application No. 60/147,462, filed August  
6, 1999, and incorporated herein by reference.

**BACKGROUND**

10        The invention relates to private lines traversing a  
packet network and re-arrangement of channels among packet  
network connections.

15        A traditional telephone exchange configuration provides  
circuit connections between remote locations. Many of the  
telecommunications networks currently used are synchronous  
digital networks. Digitized voice communications are  
transmitted synchronously over the networks at a fixed rate.  
Discrete time periods (time slots) can be packed with the  
digital information for a particular call, and digital  
20        information for multiple calls can be packed sequentially to  
form a time division multiplexed (TDM) data stream.

25        Private lines, which are dedicated, non-switchable  
links from one or more customer-specified locations to other  
customer-specified locations, offer highly available  
connectivity because they are dedicated to the use of a  
single entity such as an organization. Private lines can

provide a cost-effective alternative to usage-sensitive, switched services.

Traffic from private lines can traverse high-capacity, transmission facilities, including packet-domain network architectures. Asynchronous transfer mode (ATM) networks, for example, use fixed-size packets of data, known as cells, that are transferred between low-overhead packet switches and that provide virtual circuits between the end points of a network. The virtual circuits may be provisioned to provide a permanent virtual circuit between the end points.

One difficulty encountered in providing private line service over a packet network is that the packet network tends to induce additional delays during transmission of the private line traffic. Long delays may be unacceptable and can exacerbate echoes that interfere with the voice or other signals. Although echo cancellation techniques are available, they tend to be costly.

#### SUMMARY

According to one aspect, a method of providing communication services includes provisioning a packet network connection that has packet channels, each of which is independently capable of carrying narrowband signals so as to emulate a private line circuit. A narrowband private line that traverses the packet network connection using a particular one of the packet channels is established.

In various implementations, one or more of the following features may be present. A dedicated narrowband circuit can be associated with the particular packet channel. A dedicated narrowband circuit connection can be provided to a port of a gateway associated with the packet network connection, where the gateway is configured to perform adaptations between circuit-switched bearers and packet-switched bearers. Furthermore, additional narrowband private lines that traverse the packet network connection using other packet channels can be established without adversely affecting the existing lines.

In a related aspect, a method of providing communication services includes setting up multiple private narrowband lines associated with different entities. The private lines traverse a single virtual circuit in a packet network. Dedicated narrowband circuits can be associated with respective channels in the virtual circuit. Private lines traversing the virtual circuit can be removed without adversely affecting the remaining lines.

A communication system also is disclosed and includes gateways configured to perform adaptations between circuit-switched bearers and packet-switched bearers. A packet network includes a virtual circuit connection between a pair of the gateways, and the virtual circuit connection includes channels each of which is independently capable of carrying narrowband signals so as to emulate a private line circuit.

In some implementations, a dedicate narrowband circuit can be coupled to a port on one of the gateways in the pair to form a private line circuit traversing one of the channels in the virtual circuit connection. The system can  
5 include dedicated narrowband circuits associated with different entities and associated with different ones of the channels to form multiple private line circuits traversing a single virtual circuit connection.

In another aspect, a method of providing narrowband  
10 communication services includes rolling over a narrowband communication line that traverses a channel in a first virtual circuit connection in a packet network to a channel in a second virtual circuit connection in the packet network. The technique can be applied to private lines,  
15 although it is not limited to such applications. In some implementations, the method includes broadcasting traffic from a narrowband circuit that forms part of a private line. The traffic is broadcast over the channels in the first and second virtual circuit connections. Packets at a receiving  
20 end of the channel in the second virtual circuit connection are detected. Subsequently a path is established from the receiving end of the channel in the second virtual circuit connection to the narrowband circuit. Resources associated with the path from the receiving end of the narrowband  
25 circuit to the channel in the first virtual circuit connection then can be released.

In various implementations, one or more of the following advantages may be present. For example, private lines can more easily be adapted to packet networks. Delays that might otherwise be introduced on a private line as a  
5 result of packetizing the narrowband signals can be reduced by carrying the signals over a packet connection having multiple channels. Similarly, the need to employ echo cancellation techniques can be reduced. Furthermore, private lines can be added or removed from channels in the  
10 packet connection independently of one another.

Narrowband circuits within a packet network can be re-arranged without end-users perceiving transmission difficulties. The re-arrangement of packet channels can be applied to real-time traffic traversing packet networks, as  
15 well as private line services.

Other features and advantages will be readily apparent from the following detailed description, the accompanying drawings and the claims.

#### 20 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a telephone connection through a hybrid ATM network and an associated signaling network.

FIG. 2 is a simplified block diagram of an exemplary  
25 media gateway.

FIGS. 3A through 3D illustrate a technique for re-arranging channels among packet network connections.



### DETAILED DESCRIPTION

A large number of individual telephone circuits, such as DS0 circuits, can be carried, for example, on fiber optic carriers 10 using time-division multiplexing (TDM) according to the Telcordia Synchronous Optical Network (SONET) standards. The narrowband traffic associated with the DS0 circuits can include, for example, voice, modulated digital data from a modem, or facsimile machine data. The carriers 10 are coupled to access ports 16 in media gateways 14 (see FIG. 2).

The media gateways 14 adapt the narrowband telephone line signals to packet-based signals and vice-versa. Each gateway 14 can separate incoming TDM signals into individual DS0 signal streams. In one implementation, shown in FIG. 2, each gateway 14 includes a TDM switching matrix 17 that provides full switching capabilities. The switching matrices 17 permit the DS0 circuits to be interconnected flexibly with narrowband channels appearing on the media gateways 14. Echo cancellation and other digital signal processing functions can be performed in a digital signal processing portion 18 of each gateway. The DS0 streams are adapted by an ATM adaptation layer 20 into ATM cells. The ATM adaptation layer 20 combines incoming DS0 signals from a particular TDM carrier 10 into payloads for ATM cells. Each ATM cell is inserted through the ATM ports 21 into an ATM cell stream that traverses an ATM network 25. Each gateway

14 includes a control section 19 that controls overall operation of the gateway. In one implementation, the gateways 100A, 100B are implemented as Salix 7720 Class-Independent Switches available from Tellabs Operations, Inc.

5 As illustrated in FIG. 1, each gateway 14 is connected to an ATM end point switch 22. The connection between a gateway and an ATM end point switch 22 and the connection between the ATM end point switch and the ATM network 25 are user-network interfaces (UNIs). Within the ATM network 25,  
10 there are a number of ATM switches 26 which are interconnected by network-node interfaces (NNIs).

As described in greater detail below, a single packet network connection has multiple channels each of which can emulate a private line circuit to help reduce the delay that  
15 otherwise might be associated with each circuit. The various packet channels can be associated with narrowband circuits independently of one another to allow private lines to be added or removed without impacting the integrity of the circuits already assigned to the packet network  
20 connection.

When a customer request is received for private line service between two locations, the service provider can install, for example, a T1 line carrying twenty-four DS0 circuits at each location. Gateways 14 having connections  
25 to the customer locations are provisioned to establish a virtual packet circuit with multiple channels through the ATM network 24. For example, in one implementation, the

gateways 14 are provisioned to establish a virtual circuit with twenty-four independently assignable channels. The gateways 14 assign resources to handle the ATM cell stream. Each channel in the packet network connection is provisioned to be capable of carrying a TDM-based signal through the packet network 25 so as to emulate a private line circuit.

Once the packet-domain resources are assigned, dedicated circuit connections are provided between the customer locations through the gateways 14. The DS0 circuits are permanently assigned to an available gateway port 16 associated with the virtual circuit. Particular channels in the virtual circuit are assigned to the DS0 circuits to establish one or more narrowband private line connections between the customer locations through the packet network 25.

Additional private line circuits can be provided over the packet circuit at any time. To add another private line between customer locations, an available DS0 circuit would be assigned permanently to an available gateway port 16 associated with the virtual circuit in the ATM network 25. An available channel in the virtual circuit is assigned to the DS0 circuit to allow the new private line to traverse the packet network 25. In general, the channels in the virtual circuit can be provisioned to emulate private line circuits independently of one another, thereby permitting private lines from multiple customers to traverse a single virtual circuit in the packet network 25 without adversely

affecting the existing connections. Similarly, one or more private lines traversing the virtual circuit can be removed without adversely impacting the integrity of the remaining DS0 circuits assigned to the virtual circuit.

5 From the service provider's perspective, individual private lines from multiple customers can be bundled for transport through the core packet network, and changes in one customer's line arrangement can be made without affecting service to other customer's sharing the bundle.

10 Furthermore, by making a single packet connection available for multiple DS0 circuits, the additional delay (if any) resulting from the packet connection is distributed over the various channels in the virtual circuit. Therefore, from the user's perspective, private lines incur minimal

15 additional transmission delays even though they are packetized for transmission over the service provider's core network. Additionally, where voice circuits are carried on the lines, the techniques can reduce or eliminate the need to deploy echo cancellers on ATM-adapted private lines

20 because the delay characteristics of the lines are not appreciably changed.

In some implementations, a single private line may comprise multiple DS0 circuits. In that case, a narrowband private line circuit can be established that traverses the

25 packet network connection using multiple packet channels. For example, if a private line includes six DS0 circuits,

then six channels in the packet network connection would be used to provide the corresponding DS0 circuit emulation.

Situations may arise where it is desirable to rearrange channels among the circuits in the packet network

5 dynamically. In particular, it may be desirable to rearrange the channels so that one or more private lines traverse a different virtual circuit in the packet network. For example, assume that there are two virtual circuit connections between the gateways 14 through the ATM network  
10 25 and that each virtual circuit connection includes twenty-four independently assignable channels. Assume further that all twenty-four channels in one of the virtual circuit connections form respective private line circuits, but that only one of the channels in the second virtual circuit is  
15 being used. At some later time, there may be a request to disconnect one of the DS0 circuits associated with a channel in the first virtual circuit in the packet network. In order to free up the unused bandwidth in the ATM network, it is desirable to rearrange the packet channels so that the  
20 private line traversing the channel in the second virtual circuit traverses the free channel in the first packet circuit instead. That allows the second virtual circuit to be released.

FIGS. 3A through 3D illustrate the rearrangement of a  
25 private line circuit. The private line starts on a DS0 circuit (A) and traverses a channel in the virtual circuit (B). As described below, the channels can be rearranged so

that the private line circuit traverses an available channel in the virtual circuit (C). Although the technique is described with respect to a single gateway 14, the gateways on both sides of the virtual circuit connection (B)

5 typically would be requested to perform the rollover from the virtual circuit (B) to the virtual circuit (C) substantially simultaneously. The gateways 14, however, may perform the rollover asynchronously.

As shown in FIG. 3A, it is assumed that a private line  
10 narrowband circuit has been provisioned over the virtual circuit (B) and that the second virtual circuit (C) also exists. Each circuit includes incoming and outgoing paths with respect to the gateway 14. Upon receiving a request to reassign the DS0 circuit (A) to a channel in the virtual  
15 circuit (C), the gateway 14 bi-casts the traffic from the DS0 circuit (A) over both virtual circuits (B) and (C), as illustrated in FIG. 3B. The gateway 14 waits until it detects the presence of packets arriving at the receiving end of the specified channel in the virtual circuit (C).

20 Once the gateway 14 detects the presence of packets arriving on the receiving end of the specified channel in the virtual circuit (C), the gateway reconfigures its resources to establish an incoming path from the particular channel in the virtual circuit (C) to the receiving side of the DS0  
25 circuit (A), as shown in FIG. 3C. The gateway 14 also releases the resources that formed the incoming path from

the channel in the virtual circuit (B) to the receiving end of the DS0 circuit (A).

In some cases, it may be desirable to send "out of service" patterns on unused packet channels. In that case, the gateway 14 would try to detect the arrival of packets having different patterns on the receiving end of the specified channel in the virtual circuit (C). Once the gateway 14 detects packets having patterns other than "out of service" patterns, it would reconfigure its resources to establish an incoming path from the particular channel in the virtual circuit (C) to the receiving side of the DS0 circuit (A).

The transition from the connection arrangement of FIG. 3B to that of FIG. 3C should occur quickly to reduce the possibility of interference on the private line that is detectable by the line-terminating equipment on the customer premises or by end-users themselves. Transition times on the order of fifty milliseconds are preferred. Such times are consistent with SONET protection switching times which are well-known in the art and avoid inducing customer-detectable problems. The gateway 14 then reconfigures its resources to remove the outgoing path from the DS0 circuit (A) to the channel in the virtual circuit (B).

During the rearrangement of channels in the packet circuits, other commands should not be executed with respect to the particular DS0 circuit that forms part of the private line until the rearrangement is completed. For example, a

request to disconnect the DSO circuit should be denied or delayed until after the channels have been rearranged.

The foregoing technique can be used to rearrange channels in packet circuits dynamically so as to maximize available bandwidth. Moreover, the technique can be performed transparently to users. The technique can be used, for example, to ensure efficient use of ATM Adaptation Layer 1 (AAL1) resources in a network of gateways 14. The technique can be particularly advantageous with respect to constant bit rate and real-time variable bit rate connections. Various types of packet networks can be used, including ATM, Internet Protocol (IP), frame relay and Ethernet.

Although the rearranging of channels in packet circuits has been described in the context of private lines that traverse packet networks, the technique can be applied to switched traffic as well.

The techniques can be used in systems employing "robbed" bit supervisory signaling as well as clear channel operation.

The foregoing techniques may include manual and/or automated provisioning of the various circuits. Various features of the system can be implemented in hardware, software, or a combination of hardware and software. For example, some aspects of the system can be implemented in computer programs executing on programmable computers. Each program can be implemented in a high level procedural or



object-oriented programming language to communicate with a  
computer system. Furthermore, each such computer program  
can be stored on a storage medium, such as read-only-memory  
(ROM) readable by a general or special purpose programmable  
5 computer, for configuring and operating the computer when  
the storage medium is read by the computer to perform the  
functions described above.

Other implementations are within the scope of the  
claims.

10 What is claimed is:

15

20

25

1. A method of providing communication services  
comprising:

provisioning a packet network connection having packet  
channels each of which is independently capable of carrying  
5 narrowband signals so as to emulate a private line circuit;  
and

establishing a narrowband private line that traverses  
the packet network connection using a particular one of the  
packet channels.

10

2. The method of claim 1 including establishing  
another narrowband private line that traverses the packet  
network connection using another one of the packet channels.

15

3. The method of claim 1 including associating a  
dedicated narrowband circuit with the particular packet  
channel, wherein the narrowband circuit forms part of the  
private line.

20

4. The method of claim 3 including providing a  
dedicated narrowband circuit connection to a port of a  
gateway associated with the packet network connection,  
wherein the gateway is configured to perform adaptations  
between circuit-switched bearers and packet-switched

25 bearers.

5. A method of providing communication services comprising:

provisioning a packet network connection having packet channels each of which is independently capable of carrying narrowband signals so as to emulate a private line circuit; and

establishing a narrowband private line that traverses the packet network connection using a plurality of the packet channels.

6. A method of providing communication services comprising setting up multiple private narrowband lines associated with different entities, wherein the private lines traverse a single virtual circuit in a packet network.

7. The method of claim 6 including associating dedicated narrowband circuits with respective channels in the virtual circuit.

8. The method of claim 6 including removing fewer than all of the private lines traversing the virtual circuit.

9. A communication system comprising:  
gateways configured to perform adaptations between circuit-switched bearers and packet-switched bearers; and

a packet network including a virtual circuit connection  
between a pair of the gateways, wherein the virtual circuit  
connection includes channels each of which is independently  
capable of carrying narrowband signals so as to emulate a  
5 private line circuit.

10. The system of claim 9 including:

a dedicated narrowband circuit coupled to a port on one  
of the gateways in the pair to form a private line circuit  
10 traversing one of the channels in the virtual circuit  
connection.

11. The system of claim 9 including dedicated  
narrowband circuits associated with different entities and  
15 associated with different ones of the channels to form  
private line circuits traversing the virtual circuit  
connection.

12. A method of providing narrowband communication  
20 services comprising:

rolling over a narrowband communication line that  
traverses a channel in a first virtual circuit connection in  
a packet network to a channel in a second virtual circuit  
connection in the packet network.

25

13. The method of claim 12 wherein the narrowband  
communication line is a private line.

14. The method of claim 13 including:

broadcasting traffic from a narrowband circuit over the  
channels in the first and second virtual circuit  
5 connections.

15. The method of claim 14 including:

detecting packets at a receiving end of the channel in  
the second virtual circuit connection, wherein the packets  
10 contain information representative of an association between  
one of the channels and the narrowband circuit;

establishing a path from the receiving end of the  
channel in the second virtual circuit connection to the  
narrowband circuit; and

15 releasing resources associated with a path from a  
receiving end of the narrowband circuit to the channel in  
the first virtual circuit connection.

16. The method of claim 12 including:

20 broadcasting traffic from a narrowband circuit forming  
part of the communication line over the channels in the  
first and second virtual circuit connections.

17. The method of claim 12 wherein rolling over the  
25 narrowband communication line to the channel in the second  
virtual circuit connection is transparent to end-users.

18. An article comprising a computer-readable storage medium for storing computer-executable instructions for causing a computer system to:

5 provision a packet network connection having packet channels each of which is independently capable of carrying narrowband signals so as to emulate a private line circuit; and

10 establish a narrowband private line that traverses the packet network connection using a particular one of the packet channels.

15 19. The article of claim 18 including instructions to cause the computer system to associate a dedicated narrowband circuit with the particular packet channel.

20 20. An article comprising a computer-readable storage medium for storing computer-executable instructions for causing a computer system to:

set up multiple private narrowband lines associated with different entities, wherein the private lines traverse a single virtual circuit in a packet network.

25 21. The article of claim 20 including instructions for causing the computer system to associate dedicated narrowband circuits with respective channels in the virtual circuit.

22. An article comprising a computer-readable storage medium for storing computer-executable instructions for causing a computer system to roll over a private line that traverses a channel in a first virtual circuit connection in  
5 a packet network to a channel in a second virtual circuit connection in the packet network.

23. The article of claim 22 including instructions for causing the computer system to broadcast traffic from a  
10 narrowband circuit forming part of the private line over the channels in the first and second virtual circuit connections.

24. The article of claim 23 including instructions for  
15 causing the computer system to:

detect packets at a receiving end of the channel in the second virtual circuit connection, wherein the packets contain information representative of an association between one of the channels and the narrowband circuit; and  
20 establish a path from the receiving end of the channel in the second virtual circuit connection to the narrowband circuit.

25. The article of claim 23 including instructions for  
25 causing the computer system to release resources associated with a path from a receiving end of the narrowband circuit to the channel in the first virtual circuit connection.

ABSTRACT OF THE DISCLOSURE

Techniques for providing communication services include provisioning a packet network connection that has packet channels, each of which is independently capable of carrying narrowband signals so as to emulate a private line circuit.

A narrowband private line that traverses the packet network connection using a particular one of the packet channels is established. Delays that might otherwise be introduced as a result of packetizing the narrowband signals can be reduced.

Private lines that traverse the packet network connection using other packet channels can be added or removed without adversely affecting the existing lines. Additionally, a narrowband communication line that traverses a channel in a first virtual circuit connection in a packet network can be rolled over to a channel in a second virtual circuit connection in the packet network. The latter technique can improve the use of available bandwidth and can be applied to non-private line applications as well.




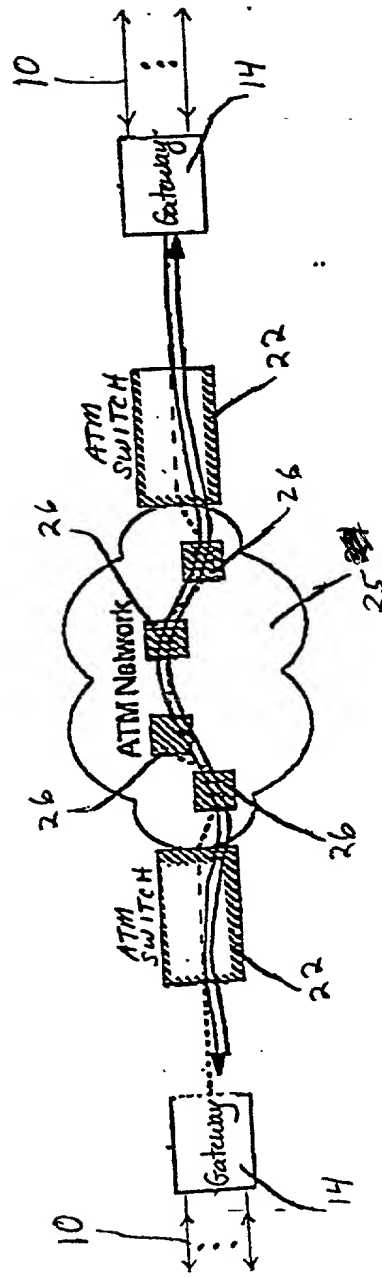


FIG. 1

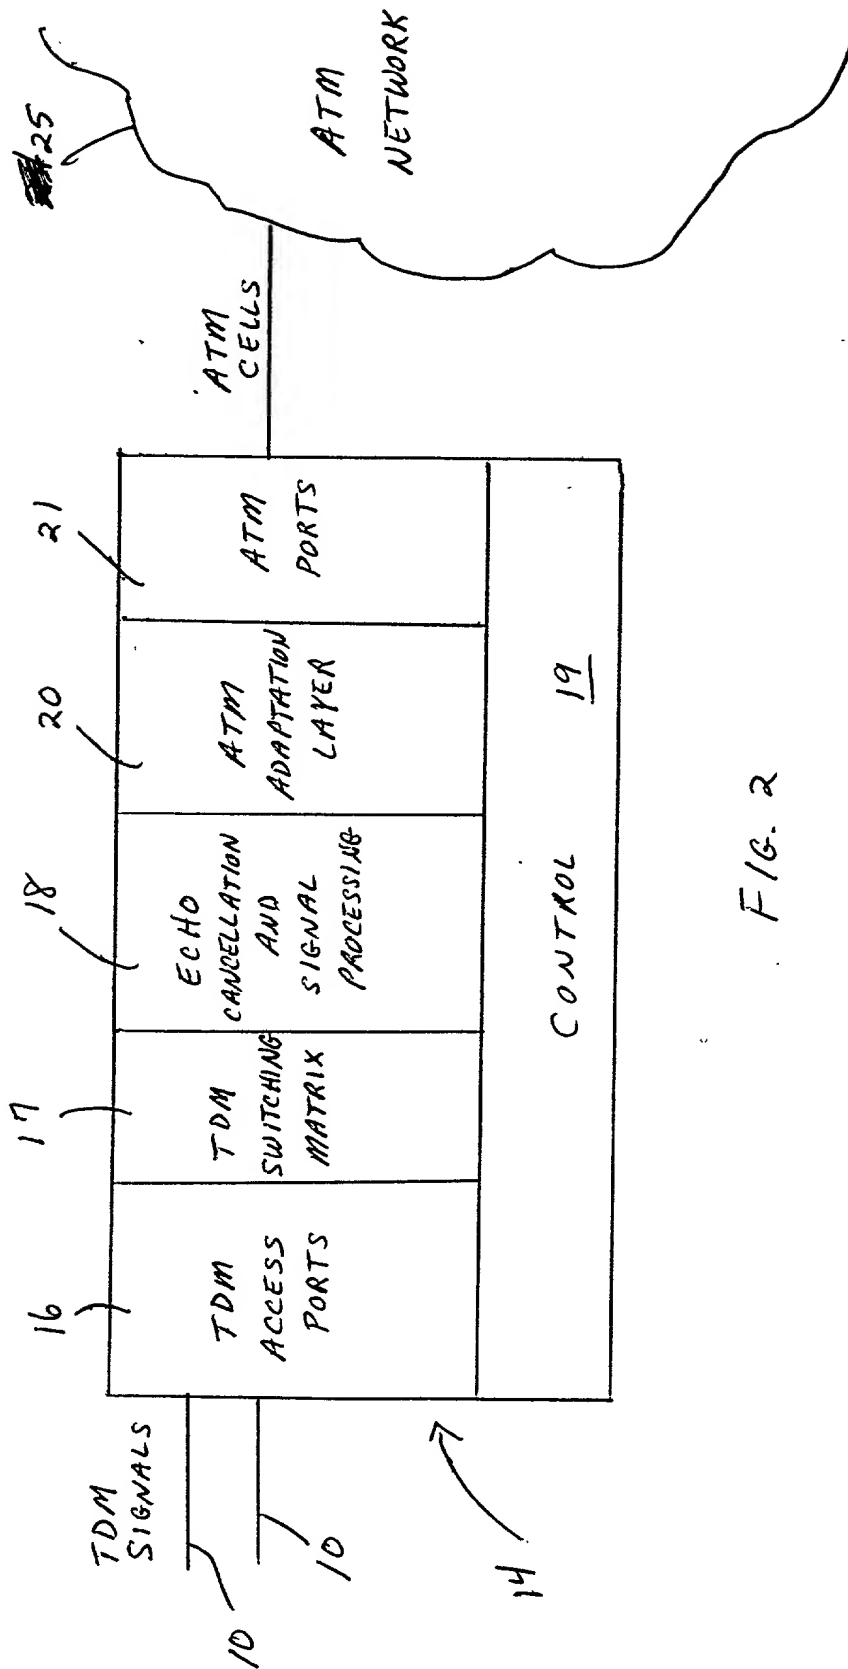

TDM  
Domain

Packet  
Domain

FIG. 3A

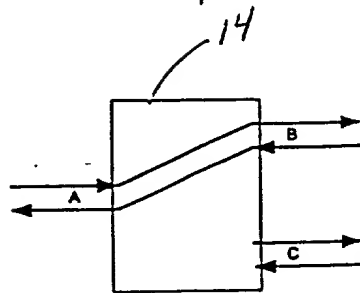


FIG. 3B

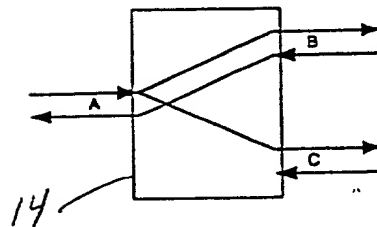


FIG. 3C

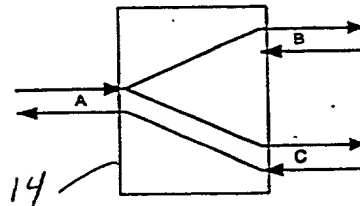


FIG. 3D

